

Reinforced polyester skin


PRODUCT DESCRIPTION

Laminated, delivered in a roll
Main uses: sandwich panel, roof, shell

COMPOSITION

Thickness 1,5 to 2 mm: Gelcoat
Polyester resin
Glass fibre
Glass woven roving

Thickness more than 2 mm: Gelcoat
Polyester resin
Glass fibre
Glass woven roving
Glass fibre
Polyester resin

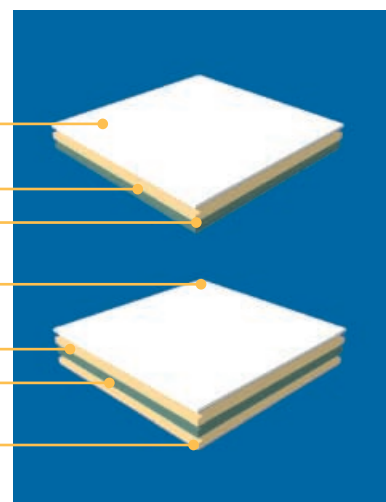

TECHNICAL SPECIFICATIONS*

	THICKNESS	WEIGHT kg/m ²
Opaque skin with white gelcoat	1,5 mm	2,4
	1,8 mm	3,1
	2,0 mm	3,5
	2,5 mm	4,3
	3,0 mm	4,7

Special for roof width 2550 mm	1,7 mm	2,6
--------------------------------------	--------	-----

2 options:
Semi-translucent: white gelcoat + translucent resin
Translucent: gelcoat translucent + translucent resin (on request)

* Average values



The values given in this data sheet have been obtained from laboratory results. They are only given as an indication. They cannot be considered as contractual and may be modified at any time without notice.

DIMENSIONS

Standard width: 2600 mm (maxi 2800 mm)
Length: no restriction (standard approx. 80000 mm)
Invoicing: standard width x length delivered
Inner diameter of roll:
400 mm (thickness 1,5 and 1,8 mm)
600 mm (thickness 2 to 3 mm)

NOTES

Gelcoat with anti-UV treatment, colour RAL 9010
Food quality
Other colours on request